

## **Declaration of Performance 0370-CPR-1722\_1694**

Nº DoP PP – BA - 01-Ed.0

**1. Unique identification code of the product-type:**

BARRA TECNO PLUS + 2141\*\*65; BARRA TECNO PLUS + 2127\*\*65

**2. Type, batch or serial number or any other element allowing identification of the construction product according to Article 11(4):**

Order number: see delivery note

**3. Intended use or uses of the construction product, according to the applicable harmonized technical specification, as established by the manufacturer**

In escape routes doors, included fire doors.

**4. Name, registered trade name or registered trade mark and contact address of the manufacturer according to Article 11(5):**

Puertas Padilla, S.L  
Av. de la Constitución Española, 73  
30330 El Albuñón – Cartagena  
Murcia- España

**5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):**

Not applicable

**6. Assessment and Verification of Constancy of Performance according to annex V:**

**System 1**

**7. Notified body:**

The notified body LGAI Technological Center S.A with the identification number: 0370 has determinate the product type on the basis of initial type testing according to the system 1.

**Test report: Nº 0370-CPR-1722\_1694 issued on the 13.03.2014**

**8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:**

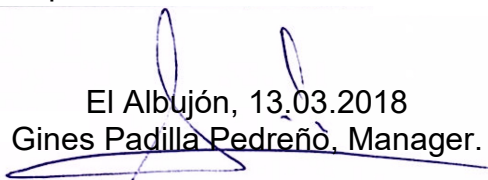
Not applicable

## 9. Declared performances

Essential characteristics		Performance	Harmonized technical specifications
<b>Ability to Release (for doors located in escape routes)</b>			EN 1125:2008
4.1.11	Bar projection	<b>Category 2:</b> Projection $W \leq 100$ mm	
4.1.23	Mass and measurements of the door	<b>Scale 6:</b> mass < 200 kg. Height < 2520 mm, Width < 1320 mm.S	
4.2.7	Goods safety requirements	<b>Scale 2:</b> The antipanic device keeps on blocking position and the door keeps closed when it is submitted to a 1000 N Force.	
<b>Durability of the Ability to Release (for doors located in escape routes)</b>			
4.1.4,4.2.9	Corrosion Resistance	<b>G Scale 3:</b> High Resistance (96h)	
4.2.4	Durability	<b>Scale 7:</b> 200.000 cycles	
<b>Durability of the automatic closing C against deterioration and ageing (for smoke doors in escape routes)</b>			
4.2.4	Durability	<b>Scale 7: 200.000 cycles</b>	
4.1.25	Dangerous substances	The materials in products do not contain or release any dangerous substances in excess of the maximum levels specified in existing European material standards or any national regulations.	

**10. The performances of the product identified in points 1 and 2 are in conformity with the declared performances in point 9.**

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

  
 El Albuñón, 13.03.2018  
 Gines Padilla Pedreño, Manager.

(Sign)